


# GRADALL®

## XL 7320 V

### MINE SCALER MACHINE

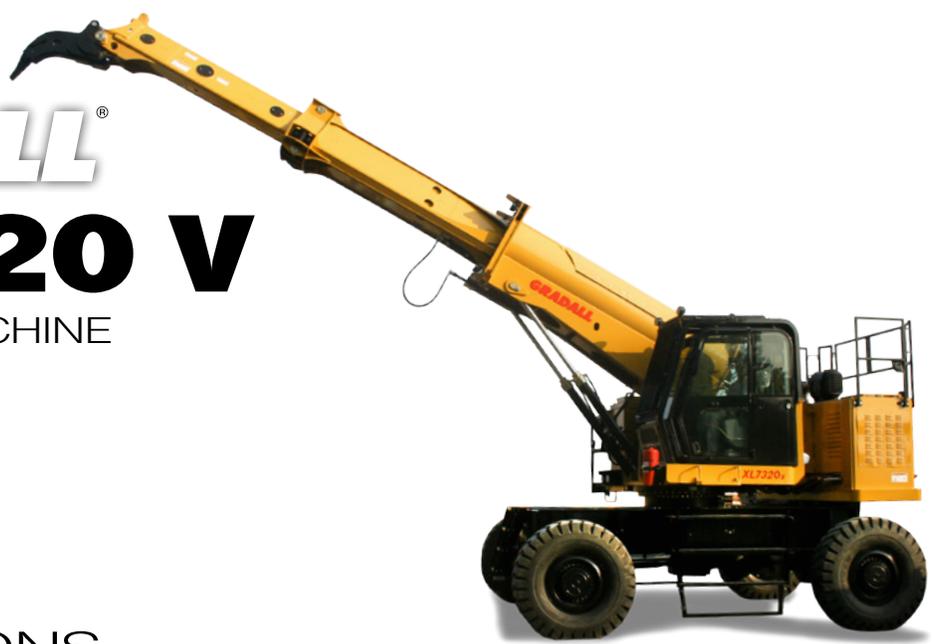

## SPECIFICATIONS

### Upperstructure Engine

VOLVO TAD572 VE, TIER 4f, MSHA Certified 4 cycle, inline 4 cylinder, liquid cooled, electronic controlled. Vertical canister style lube filter attached to engine. Vertical canister style main fuel filter and fuel/water separation with manual feed pump attached to engine. Water in fuel indicator and alarm.

Gross Rating: 215HP @ 2200 RPM (160kW)  
671 ft lb Torque @ 1100-1500 RPM (910Nm)

Net Rating: 195 HP @ 2200 RPM (145kW)

Variable viscous fan clutch system. Vertical stacked hydraulic oil cooler, charge air cooler and radiator.

Maximum slope: 30°

24 volt starter, 100 amp alternator, two SAE #C31-S 1000 CCA batteries, two-stage air cleaner with high-efficiency pre-cleaner, vacuator valve and remote service indicator.

Fuel tank capacity: 90 gallon (341 L).

### Hydraulic System

#### PUMPS

One load-sensing, axial piston pump; oil flow 0-110 GPM (0-416 L/min).

Tandem gear pump (steering, brake/pilot) 10 GPM (38 L/min), 6 GPM (23 L/min).

#### SYSTEM MONITOR

Electronic monitor in cab indicates low hydraulic fluid level, high hydraulic fluid temperature, system working pressure, system pilot pressure.

#### SYSTEM SPECIFICATIONS

##### Six cylinders

- 1 tool: 5.0" ID, 3.0" rod, (127 mm x 76 mm) 25.9" (658 mm) stroke.
- 2 hoist: 4.25" ID, 3.0" rod, (108 mm x 76 mm) 53.43" (1357 mm) stroke.
- 1 telescope: 4.5" ID, 3.25" rod, (114 mm x 83 mm) 13'6" (3.94 m) stroke.
- 2 single-acting axle oscillation cylinders.

#### Three hydraulic motors

Swing, 68 hp (51 kW); tilt, 28 hp (21 kW); propel motor, 113 hp (84 kW).

#### Operating pressures:

Hoist.....	4,900 psi	(331 BAR)
Tilt.....	2,400 psi	(165 BAR)
Swing.....	4,500 psi	(310 BAR)
Tool.....	4,900 psi	(331 BAR)
Telescope.....	3,300 psi	(228 BAR)
Propel.....	4,900 psi	(331 BAR)
Pilot System.....	550 psi	(38 BAR)
Braking & Steering.....	2,400 psi	(165 BAR)

#### Oil Capacity

Reservoir system 61 gallon (231 L). Pressurized reservoir with visual oil level gauges.

#### Filtration System

10 micron return filter, 10 micron pilot filter. Fin and tube-type oil cooler with thermal by-pass and relief valves.

Pressure-compensated, load-sensing valves with circuit reliefs in all circuits.

### Operator Cab

All-weather cab with tinted safety glass windows, acoustical lining, four-way adjustable operator's seat, AM/FM radio, filtered fresh air heater, defroster, and A/C. Front window slides to overhead position. Rearview mirror on left side. Standard equipment includes operator's seat belt, and swing lights. Cab tilt angle is infinitely adjustable from level to 23° upward.

### Controls

Two electronic joysticks (hoist and bucket, telescope and swing), one rocker switch (tilt) control upperstructure. Joysticks mounted on arm pods, independently adjustable for individual operator comfort and convenience. Quick change joystick pattern switch located on instrument panel. Joysticks are self-centering; when controls are released, power for movement disengages and swing and tilt brake set automatically.

A tilting/telescoping steering column provides smooth, comfortable steering. Hydraulic foot pedal controls braking functions, giving smooth performance with infinite control. Travel speed is regulated with an electronic foot pedal control. A switch on the FWD/REV selector provides 1st/2nd gear selection. Independent rocker switches control park brake and travel alarm mode.

#### Engine Controls and Instrumentation

Key operated ignition/starter switch, throttle, and main battery disconnect switch. Air cleaner condition indicator. Electronic monitor indicates fuel level, low battery charge, lube oil pressure, high coolant temperature, engine rpm, and engine hours. Fuel saving auto idle feature sends engine rpm to idle when control circuits are in neutral for seven seconds.

### Undercarriage

Full-time 4 x 4 drive with 2-speed Powershift transmission. Rigid mount rear axle. Oscillating front steer axle with automatic lock-out cylinders. Four-wheel enclosed sealed wet disc brakes. Access ladders on both sides and both ends of machine. Locking toolboxes on each side.

#### Maximum Travel Speed:

11 mph (17.7 kph).

#### Maximum Gradeability:

47%.

#### Minimum Turning Radius (curb-to-curb):

38 ft (11.6 m).



#### Tires:

16.00 x 25 (28 ply).

### Weight

#### Approximate working weight:

77,500 lb (35,153 kg).

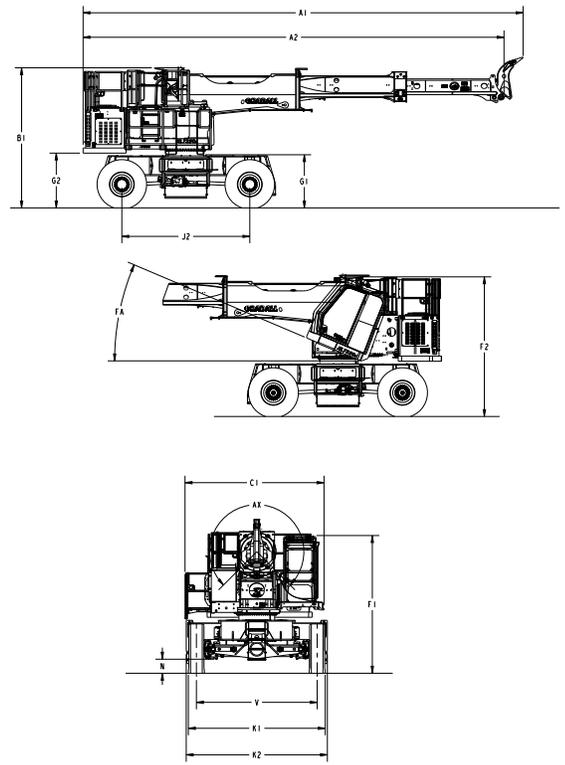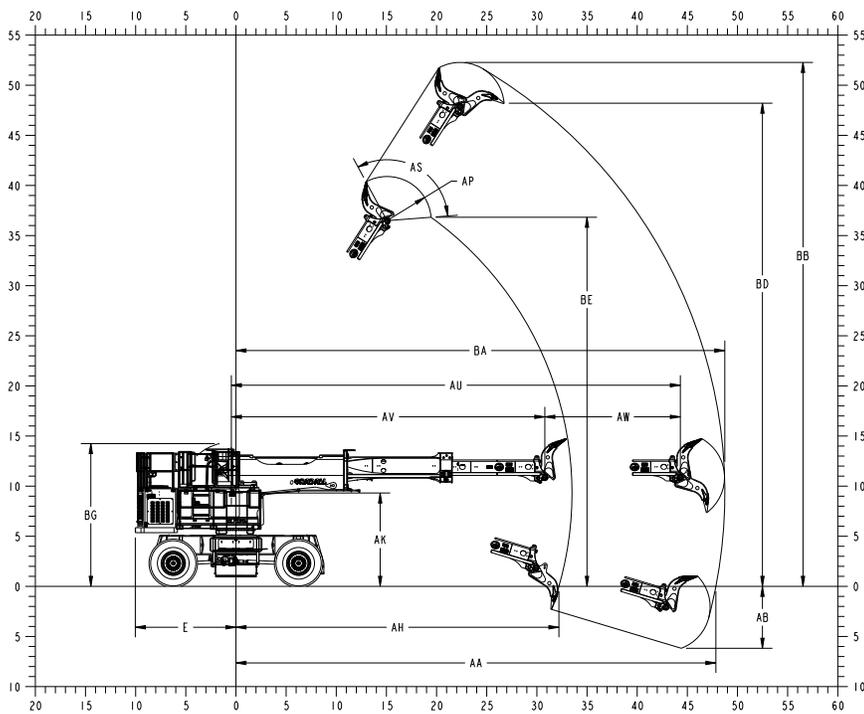

## Dimensions

- A1** Overall length (boom level) with scaling hook: 43'0" (13.1)
- A2** Overall length (boom level) without scaling hook: 41'1" (12.5)
- B1** Overall height (boom level): 13'8" (4.2)
- C1** Width of upperstructure: 13'4" (4.1)
- E** Swing clearance, rear of upperstructure: 10'0" (3.0)
- F1** Top of cab guard to groundline (cab level): 13'2" (4.0)
- F2** Top of cab guard to groundline (cab at full tilt): 13'6" (4.1)
- FA** Cab tilt: 23°
- G1** Clearance, upperstructure to groundline: 5'2" (1.6)
- G2** Clearance, counterweight to groundline: 5'4" (1.6)
- J2** Nominal distance between centerlines of front and rear axles: 12'6" (3.8)
- K1** Width of chassis, toolboxes in inner position: 13'1" (4.0)
- K2** Width of chassis, toolboxes in outer position: 13'6" (4.1)
- N** Ground clearance: 1'4" (0.4)
- V** Wheel centerline to wheel centerline: 11'7" (3.5)
- AA** Maximum radius at groundline: 47'10" (14.6)
- AB** Maximum depth: 6'2" (1.9)
- AH** Minimum radius at groundline: 32'2" (9.8)
- AK** Boom pivot to groundline: 9'4" (2.8)
- AP** Scaling hook tooth radius: 4'5" (1.3)
- AS** Attachment pivot angle: 114°
- AU** Maximum telescoping boom length (boom pivot to attachment pivot): 44'9" (13.6)
- AV** Minimum telescoping boom length (boom pivot to attachment pivot): 31'3" (9.5)
- AW** Telescoping boom travel: 13'6" (4.1)
- AX** Standard boom tilt angle: 270°
- BA** Maximum radius of working equipment: 48'9" (14.9)
- BB** Maximum height of working equipment: 52'3" (15.9)
- BD** Minimum clearance of scaling tooth, with attachment pivot at maximum height: 48'2" (14.7)
- BE** Minimum clearance of scaling tooth at maximum boom height: 36'10" (11.2)
- BG** Maximum height of working equipment with boom below groundline: 14'3" (4.3)

Metric units are meters (m) unless noted.

# GRADALL®

406 Mill Ave. SW, New Philadelphia, Ohio 44663  
 Phone: 330-339-2211 Fax: 330-339-8468  
[www.Gradall.com](http://www.Gradall.com)

Certified ISO 9001



Form No. 11518 2/17  
 Printed in USA

It is Gradall Policy to continually improve its products. Therefore designs, materials and specifications are subject to change without notice and without incurring any liability on units already sold. Units shown may have optional equipment.