

T1

Mobile Emulsion Storage/Delivery Tank



Maximize Your Patching Efficiency:

The Cimline T1 emulsion transport trailer will improve your efficiency by having emulsion on site for your patching crew. When the T1 is paired with a spray injection patcher, your crew stays on the job site longer, saving time and money with fewer trips to the emulsion plant. The T1 further optimizes your operation with the ability to heat emulsion to your climate and application specifications easily and quickly with powerful electric heating blankets.



1,000-gallon Capacity Tank:

Allows crews more time and efficiency on the job site with three to four times the emulsion storage capacity of a standard spray patching unit. A recirculation circuit and 5hp Honda driven 15gpm Viking pump in the plumbing provides agitation keeping the emulsion properly mixed.

Electric Heated Thermostatic Controlled:

Two 1500-watt, 110-volt heating blankets are thermostatically controlled to maintain the optimum emulsion application or storage temperature. Blanket heating also allows the tank to be preheated preventing emulsion shock and helping extend the life of your emulsion.

Fast Filling:

Filling the T1 tank is simple with the large 14" vented, locking loading port. Loading your patcher is fast and easy with a 15gpm pump and 1-1/2" x 10' heavy duty flexible rubber hose with cam lock quick connects.

Heavy Gauge Insulated Tank:

The tank features two-inches of insulation and it is protected from the elements with a fire retardant cover.






Electric Overnight Heating System



Large Temperature Gauge



5 Gallon Solvent Tank For System Flush

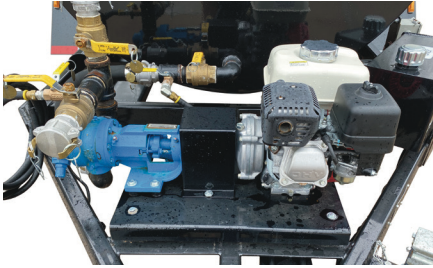

5hp Gas Engine & 15gpm Gear Pump



Large 14" Lockable Tank Fill Port



Skid Model Available

SPECIFICATIONS

Cimline T1 #408129

Material Capacity	1000 US Gallons
Engine	5hp Gas Honda
Engine Fuel Capacity	2 US Gallons
Heating Method	Electric Blanket
Heat Raring	1500w x 2, 110VAC (220VAC Optional)
Material Pump	15GPM Viking Gear Pump
Loading Hose	1-1/2" ID x 10' Flexible Heavy Duty Rubber
Material Outlet Port	1-1/2 Inch With Cam Lock Coupling
Loading Ports	14" x 2 (One is Locking and Vented)
Temperature Gauge	5 Inch Analog Dial Type
Drain Valve	3" Brass Ball Valve
Tank Insulation	2" With Fiber Reinforced Protective Cover
Trailer Construction	2"x6"x1/4" Tube Steel
Trailer Braking	Electric
Axles/Suspension	2x7000Lbs./Slipper Spring
Dimensions (LxWxH)	190 x 90 x 90 Inches
GVWR	14,000Lbs.
Shipping Weight	3760Lbs.
Warranty	1 Year

Due to continuous improvement, specifications are subject to change without notice.



Learn more at cimline.com
Phone : 800-328-3874 Email : orders@cimline.com

DURAPATCHER
TECHNOLOGY

©2021 Cimline Inc. All rights reserved.

PRODUCTS FROM CIMLINE



P2™ Two-Person Patcher with DuraPatcher™ Technology



P5™ One-Person Patcher with DuraPatcher™ Technology



T-Series™ Stationary Emulsion Storage Tanks