



**INNOVATION  
IN PRESERVATION**

# M-Series™ Crack Sealers



## STANDARD



**Durable M-Series  
Heated Hose**

The reputation for simple, safe, and sustainable operation lives on with the M-Series, which marks a new chapter for Cimline™ with signature safety green paint. Going green means more than a paint color change as the M-Series comes standard with lower emissions, lower fuel consumption, and quieter operation for a better work environment. The low-profile design, high production, and ease of use continue to make Cimline the crack sealing leader.



**Lowest Height  
Largest Door**

Redefined Reliability: Heated hose life is extended because the no-stress boom swivels around the heated sealing hose, unlike any other machine, minimizing hose stress and providing an industry-leading operating range.

Community and Operation Friendly: The clean Tier IV compliant diesel engine runs at the lowest possible RPM for the best combination of performance and fuel economy. The noise levels are best in class and up to 40% lower than other industry models.



**Torsion Axels**

## M-SERIES FAMILY



**M1  
without pump**




**M2  
with pump**



**M1  
with pump**




**M4 dual hose, dual pump and conveyor**



**Performance Tank Design**

800-328-3874  
CIMLINE.COM

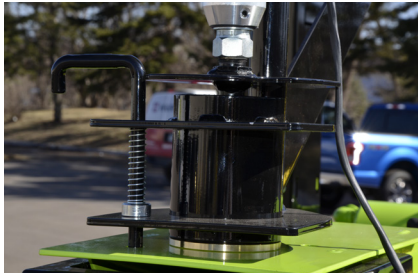

No-stress boom rotates around hose



M-Series™ Lightweight Wand



Optional heated draw-off option



Optional engine cover



Optional X2, Carry-On Air Compressor



Simple seal controller

## SPECIFICATIONS

	M1**	M2**	M4
Material Capacity gal. (liters)	150 (568)	230 (871)	410 (1552)
Engine HP	25 Diesel	25 Diesel	25 Diesel
Heating Method	Diesel	Diesel	Diesel
Heat Rating BTUs	250,000	290,000	400,000
Material Pump GPM (LPM)	20 (76)	20 (76)	20 (76)
GVWR lbs. (kg)	5515 (2501)	6670 (3025)	9259 (4200)
GAWR lbs. (kg)	7000 (3175)	7000 (3175)	10,000 (4536)
Axles/ Suspension	1 (torsion type)	2 (torsion type)	2 (torsion type)
Brake Type	Electric*	Electric*	Electric*
Loading Height in. (mm)	50 (1270)	48 (1219)	54 (1372)
Loading Doors	Single Curbside	Dual	Dual
Fuel Capacity gal. (liters)	33 (125)	33 (125)	33 (125)
Hydraulic Capacity gal. (liters)	33 (125)	33 (125)	33 (125)
Heat Transfer Oil gal. (liters)	22 (83)	30 (114)	40 (151)
Dimensions L x W x H in. (L x W x H mm.)	152 x 82 x 93 (3692 x 2083 x 2362)	170 x 79 x 92 (4318 x 2007 x 2336)	185 x 90 x 90 (4699 x 2286 x 2286)
Shipping Weight lbs. (kg)	4,200 (1,905)	4,750 (2,155)	6,000 (2,721)
Warranty	One Year Bumper to Bumper		

Due to continuous improvement, specifications are subject to change without notice.  
 \*\* Available without pump.



Learn more at [cimline.com](http://cimline.com)  
 Phone : 800-328-3874 Email : [customerorders@plymouthind.com](mailto:customerorders@plymouthind.com)